

SURGiNG

紹 鑫 實 業



Fuses

保险丝


06H Series

06H RoHS Compliant



贴片保险丝(抗浪涌型)

SMD Fuse (High Inrush Current Withstand) 32V

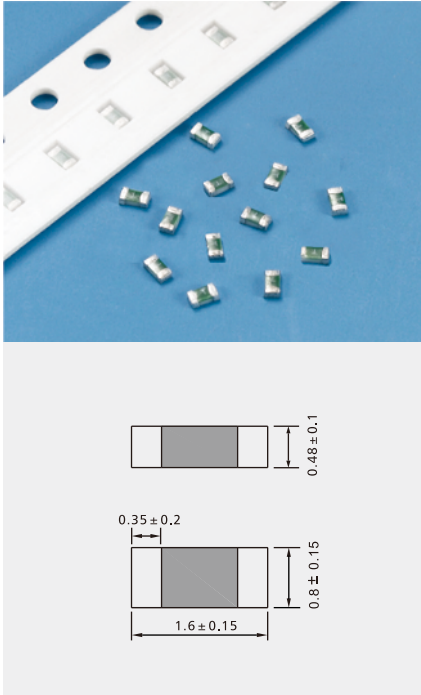

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	标示 Making	熔化热能 ² T Melting Integral (A ² .S)
06H1100D	1A	32V	H	0.017
06H1150D	1.5A	32V	K	0.060
06H1200D	2A	32V	N	0.183
06H1250D	2.5A	32V	O	0.240
06H1300D	3A	32V	P	0.270
06H1350D	3.5A	32V	R	0.555
06H1400D	4A	32V	S	0.936
06H1500D	5A	32V	T	1.865

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
CFLUS	1A~5A	E221465

额定分断能力:


Interrupting Rating:

50 Amperes at 32V DC

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	1 s ~ 60 s
250%	5 s Max(小于5秒)

Time-Current Characteristics
电流-时间曲线图

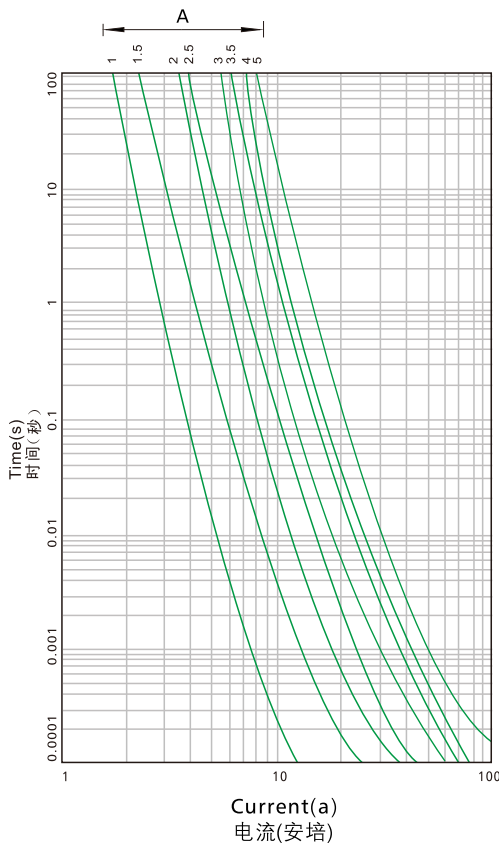

工作温度 Operating Temperature

-40°C~+125°C

材料 Materials

Substrate:ceramic/glass cover
Termination:sliver over-plated with nickel and tin
Element:silver

焊接方法 Soldering Method

Solder reflow:260°C,10 s max.

包装 Packaging

Automaton taped 5000PCS per reel,50000PCS per carton.