

SURGiNG

紹 鑫 實 業



Fuses

保险丝



2D Series




2E $\Phi 3 \times 7$ RoHS Compliant

超小型保险丝(延时型)

Micro Fuse(Time-Lag)250V/125V

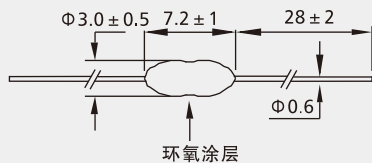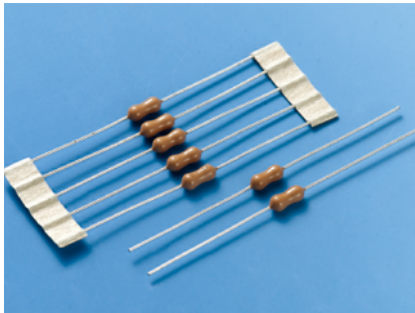

Time-Current Characteristics
电流-时间曲线图

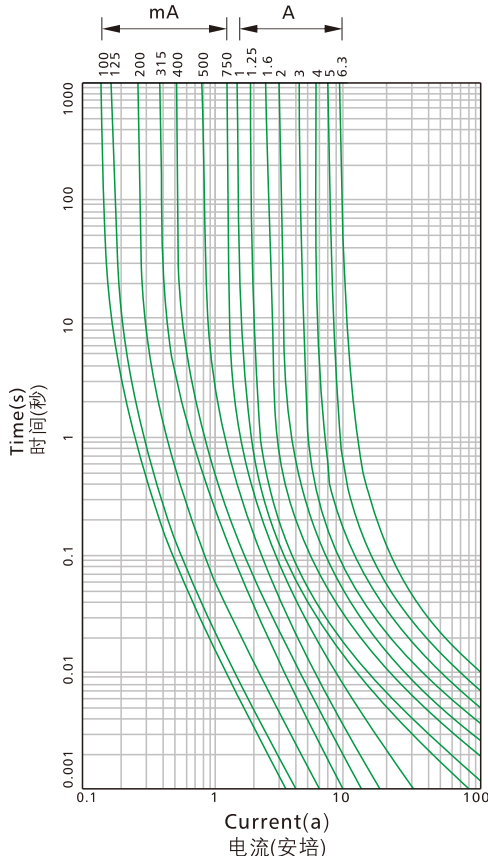

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² T Melting Integral (A ² .S)
2E0100A/B	100mA	250V/125V	0.01
2E0125A/B	125mA	250V/125V	0.02
2E0160A/B	160mA	250V/125V	0.04
2E0200A/B	200mA	250V/125V	0.06
2E0250A/B	250mA	250V/125V	0.09
2E0300A/B	300mA	250V/125V	0.12
2E0315A/B	315mA	250V/125V	0.15
2E0350A/B	350mA	250V/125V	0.19
2E0400A/B	400mA	250V/125V	0.31
2E0500A/B	500mA	250V/125V	0.46
2E0630A/B	630mA	250V/125V	0.78
2E0750A/B	750mA	250V/125V	0.93
2E0800A/B	800mA	250V/125V	1.1
2E1100A/B	1A	250V/125V	1.3
2E1125A/B	1.25A	250V/125V	2.6
2E1150A/B	1.5A	250V/125V	3.1
2E1160A/B	1.6A	250V/125V	3.9
2E1200A/B	2A	250V/125V	7.2
2E1250A/B	2.5A	250V/125V	12
2E1300A/B	3A	250V/125V	15
2E1315A/B	3.15A	250V/125V	19
2E1350A/B	3.5A	250V/125V	24
2E1400A/B	4A	250V/125V	29
2E1500A/B	5A	250V/125V	59
2E1630A/B	6.3A	250V/125V	90

目录编号: Catalog No.A:250V B:125V

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	100mA~6.3A	E221465
	100mA~6.3A	E221465
	1A~5A	JET5359-31007-1001
	6.3A	JET5359-31007-1002
	200mA~4A	CQC14012107012

额定分断能力:

Interrupting Rating:

50 Amperes at 125V AC

50 Amperes at 250V AC

测试标准:

Testing Standard: UL248-14

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	60 s Max (小于60秒)
1000%	10 ms Min (大于10毫秒)