

SURGiNG

紹 鑫 實 業



Fuses

保险丝


SNT Series



SNT RoHS Compliant


微型保险丝(延时型)

Micro Fuse (Time-Lag) 250V/300V/350V

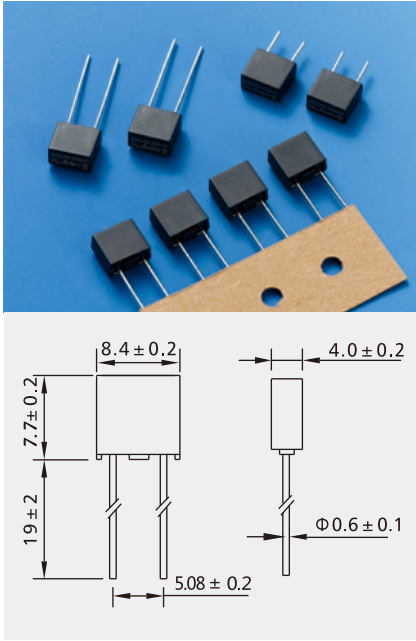

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)
SNT0100H/G/A	100mA	350V/300V/250V	350	0.06
SNT0125H/G/A	125mA	350V/300V/250V	300	0.08
SNT0160H/G/A	160mA	350V/300V/250V	280	0.10
SNT0200H/G/A	200mA	350V/300V/250V	260	0.20
SNT0250H/G/A	250mA	350V/300V/250V	240	0.40
SNT0315H/G/A	315mA	350V/300V/250V	220	0.49
SNT0400H/G/A	400mA	350V/300V/250V	200	0.58
SNT0500H/G/A	500mA	350V/300V/250V	190	0.65
SNT0630H/G/A	630mA	350V/300V/250V	180	0.80
SNT0800H/G/A	800mA	350V/300V/250V	160	2.8
SNT1100H/G/A	1A	350V/300V/250V	140	5.2
SNT1125H/G/A	1.25A	350V/300V/250V	130	7.2
SNT1160H/G/A	1.6A	350V/300V/250V	120	10
SNT1200H/G/A	2A	350V/300V/250V	100	15
SNT1250H/G/A	2.5A	350V/300V/250V	100	34
SNT1315H/G/A	3.15A	350V/300V/250V	100	51
SNT1400H/G/A	4A	350V/300V/250V	100	80
SNT1500H/G/A	5A	350V/300V/250V	100	110
SNT1630H/G/A	6.3A	350V/300V/250V	100	170

Time-Current Characteristics
电流-时间曲线图

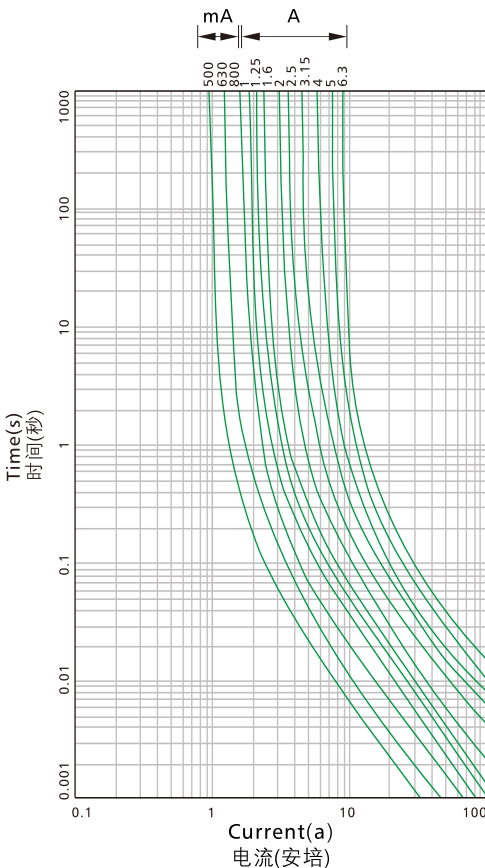

目录编号：Catalog No. H:350V G:300V A:250V

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	100mA~6.3A	E221465

额定分断能力:

Interrupting Rating:

100 Amperes at 250V/300/350V AC

测试标准:

Testing Standard: IEC60127-3 GB9364-3

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
210%	2 min Max(小于2分钟)
275%	400 ms~10 s
400%	150 ms~3 s
1000%	20 ms~150 ms