


SURGiNG

紹 鑫 實 業

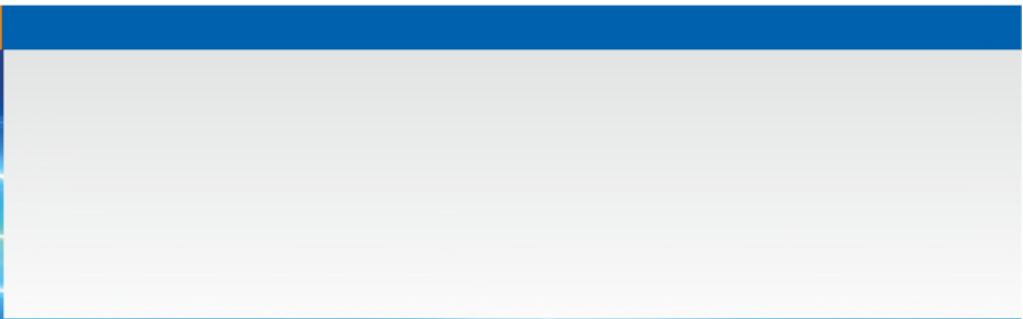


Glass Discharge Tube


玻璃放电管

SSD35 Series

Type SSD35Series / 突波吸收器 Surge Absorber

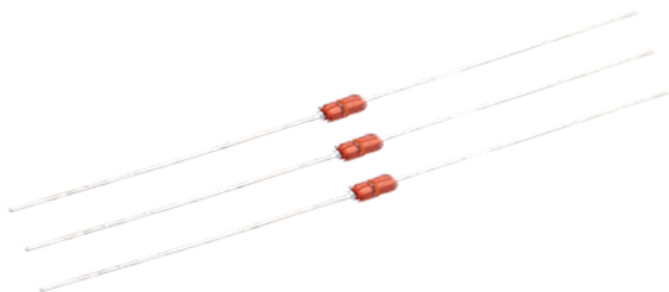

Dimensions(mm)尺寸

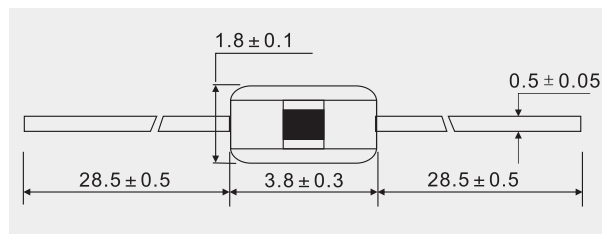

Features 特性

- Quick response
- Low capacitance
- Small size
- Low price

Applications 應用

- R.G.B and Grid of TV Monitor
- TEL,FAX,MODEM
- Power supply
- AUTO audio Frequency .navigation system

Electrical Specifications 電氣特性

| Catalog Number 料號 | DC Spark-Over Voltage 標稱直流擊穿電壓 100V/s Vs(V) | Impulse Spark Over 衝擊擊穿電壓 1KV / μ s Vis(V) Max. | Nom Impulse Discharge Current 耐衝擊電流 8x20 μ s kV | Nom Impulse Discharge Current 耐衝擊電流 8x20 μ s(A) | Insulation Resistance 絕緣電阻 Min. DC M Ω V | | Capacitance 電容值 C 1kHz<6V pF Maz. |
|----------------------|---|---|--|---|--|-----|--|
| SSD35 -141N | 140V \pm 30% | 500 | 1.0 | 0.5 | 100 | 100 | 1.0 |
| SSD35 -201M | 200V \pm 20% | 600 | 1.0 | 0.5 | 100 | 100 | 1.0 |
| SSD35 -301M | 300V \pm 20% | 900 | 1.0 | 0.5 | 100 | 100 | 1.0 |
| SSD35 -401M | 400V \pm 20% | 1000 | 1.0 | 0.5 | 100 | 250 | 1.0 |
| SSD35 -501M | 500V \pm 20% | | 1.0 | 0.5 | 100 | 250 | 1.0 |
| SSD35 -601M | 600V \pm 20% | | 1.0 | 0.5 | 100 | 250 | 1.0 |
| SSD35 -102M | 1000V \pm 20% | | 1.0 | 0.5 | 100 | 250 | 1.0 |

Materials 材料

Ceramic: Si Oxide
 Metallization of Glass body
 End termination : Dumet wire
 End termination overcoat : Tin

Operation Temperature 工作溫度

-40°C to 125°C

Packaging 包裝

On Taping : SSD35 series-3000pcs Per Reel
 SSD35 series-30000pcs outer box