




5J $\Phi 5.2 \times 20$ RoHS Compliant



玻璃保险丝管(快断型)

Glass Tube Fuse (Fast-Acting) 250V

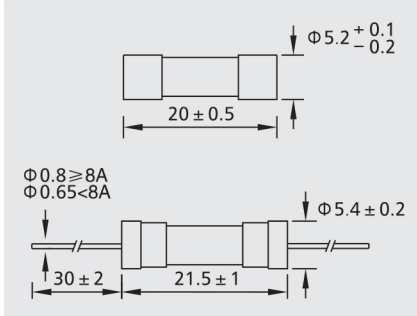

测试标准:
Testing Standard:
IEC60127-1 IEC60127-2 GB9364.1 GB9364.2


额定分断能力:
Interrupting Rating:
35A or 10In Whichever is greater

工作温度:
Operating Temperature:
 $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

材料:
Materials:
End cap:nickel plated brass
Glass tube:glass
Lead wire:tinned copper wire
Inner cap:nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C , 10s max
Manual soldering: 350°C , 5s max

Time-Current Characteristics 电流-时间曲线图

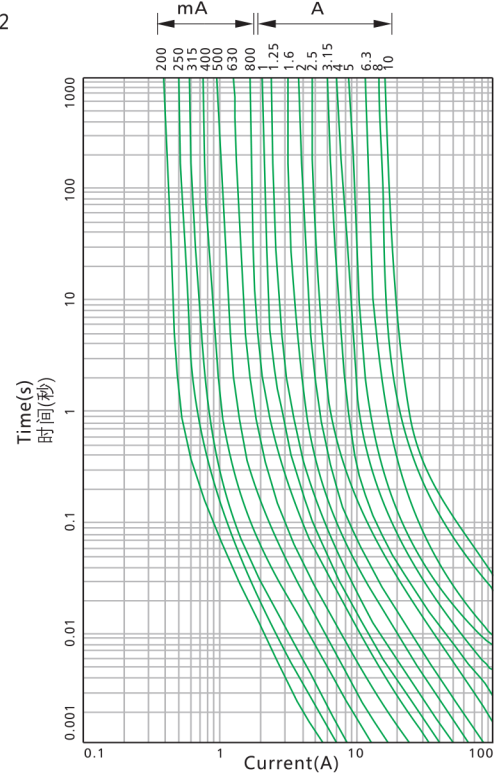

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time (200mA~6.3A)	熔断时间 Opening Time (8A~10A)
210%	30 min Max(小于30分钟)	30 min Max(小于30分钟)
275%	50 ms~2 s	50 ms~2 s
400%	10 ms~300 ms	10 ms~400 ms
1000%	20 ms Max(小于20毫秒)	40 ms Max(小于40毫秒)

目录编号: Catalog No.A:250V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals					
					UL US	VDE	CCC	CQC	PSE JET	K
5J0200A	200mA	250V	1700	0.04	●	●	●			●
5J0250A	250mA	250V	1400	0.06	●	●	●			●
5J0315A	315mA	250V	1300	0.10	●	●	●			●
5J0400A	400mA	250V	1200	0.20	●	●	●			●
5J0500A	500mA	250V	1000	0.35	●	●	●			●
5J0630A	630mA	250V	650	0.50	●	●	●			●
5J0800A	800mA	250V	240	1.3	●	●	●			●
5J1100A	1A	250V	200	1.6	●	●	●			●
5J1125A	1.25A	250V	200	2.4	●	●	●		●	●
5J1160A	1.6A	250V	190	4.6	●	●	●		●	●
5J1200A	2A	250V	170	7.9	●	●	●		●	●
5J1250A	2.5A	250V	170	12	●	●	●		●	●
5J1315A	3.15A	250V	150	22	●	●	●		●	●
5J1400A	4A	250V	130	29	●	●	●		●	●
5J1500A	5A	250V	130	78	●	●	●		●	●
5J1630A	6.3A	250V	130	97	●	●	●		●	●
5J1800A	8A	250V	100	290	●	●		●	●	
5J2100A	10A	250V	100	430	●	●		●	●	
5J2120A	12A	250V	-	-	●			●		
5J2150A	15A	250V	-	-	●					

● 表示已获认证
○ 表示认证中