


3K $\Phi 3.6 \times 10$ RoHS Compliant



玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V



测试标准:
Testing Standard:
IEC60127-1 IEC60127-3 GB9364.1 GB9364.3

额定分断能力:
Interrupting Rating:
35A or 10In Whichever is greater

工作温度:
Operating Temperature:
-55°C ~ +125°C


材料:
Materials:
End cap: nickel plated brass
Glass tube: glass
Lead wire: tinned copper wire
Inner cap: nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

电气特性: Electrical Characteristics

额定电流的% of Ampere Rating	熔断时间 Opening Time
210%	2min Max(小于2分钟)
275%	400ms ~ 10s
400%	150ms ~ 3s
1000%	20 ms ~ 150ms

Time-Current Characteristics
电流-时间曲线图

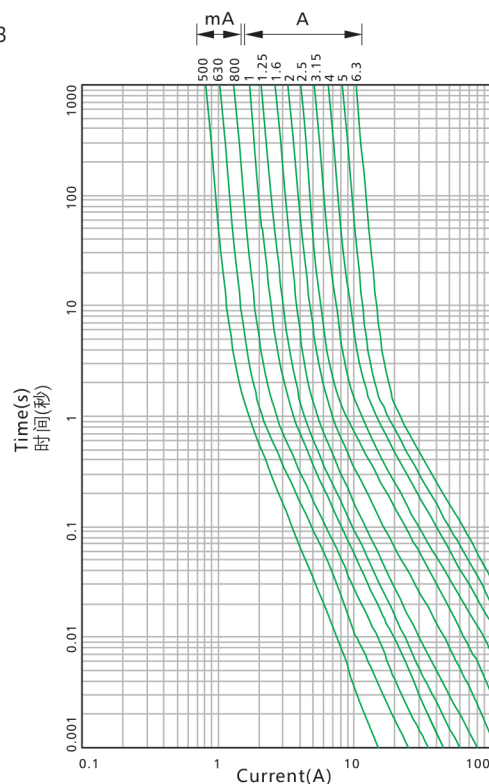

目录编号: Catalog No.A:250V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals			
3K0200AP	200mA	250V	260	0.04	●	●	●	
3K0250AP	250mA	250V	240	0.06	●	●	●	
3K0315AP	315mA	250V	220	0.09	●	●	●	
3K0400AP	400mA	250V	200	0.2	●	●	●	
3K0500AP	500mA	250V	190	0.72	●	●	●	●
3K0630AP	630mA	250V	180	1.35	●	●	●	
3K0800AP	800mA	250V	160	2.92	●	●	●	
3K1100AP	1A	250V	140	4.6	●	●	●	●
3K1125AP	1.25A	250V	130	8.2	●	●	●	
3K1160AP	1.6A	250V	120	15	●	●	●	●
3K1200AP	2A	250V	100	20.3	●	●	●	●
3K1250AP	2.5A	250V	100	44.1	●	●	●	
3K1315AP	3.15A	250V	100	61	●	●	●	●
3K1400AP	4A	250V	100	116	●	●	●	●
3K1500AP	5A	250V	100	160	●	●	●	●
3K1630AP	6.3A	250V	100	200	●	●	●	

● 表示已获认证
● 表示认证中