

SURGiNG

紹 鑫 實 業




Ceramic Tube Fuse

电力电子保险丝

PHV Series



光伏保险丝管 Photovoltaic Fuse 1000V

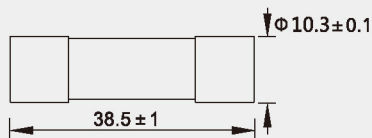


测试标准:
Testing Standard:
UL2579

额定分断能力:
Interrupting Rating:
UL10K Amperes at 1000V DC
IEC33K Amperes at 1000VDC

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap:silver plating
Ceramic tube:ceramic

Time-Current Characteristics
电流-时间曲线图

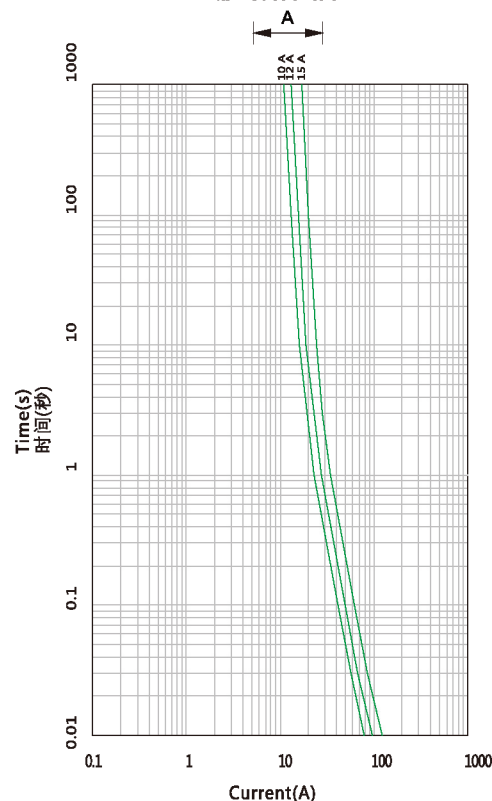

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	120 s Max(小于120秒)

目录编号: Catalog No.M:1000V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals
				● 表示已获认证 ● 表示认证中
PHV1100M	1A	1000V	0.4	●
PHV1200M	2A	1000V	3.4	●
PHV1300M	3A	1000V	12	●
PHV1350M	3.5A	1000V	20	●
PHV1400M	4A	1000V	28	●
PHV1500M	5A	1000V	50	●
PHV1600M	6A	1000V	93	●
PHV1800M	8A	1000V	33	●
PHV2100M	10A	1000V	70	●
PHV2120M	12A	1000V	200	●
PHV2150M	15A	1000V	230	●