


# 2-Electrode Arresters 二极放电管

## Heavy-duty types 大功率系列 20 kA / 20 A · Ø 8 x 6 mm

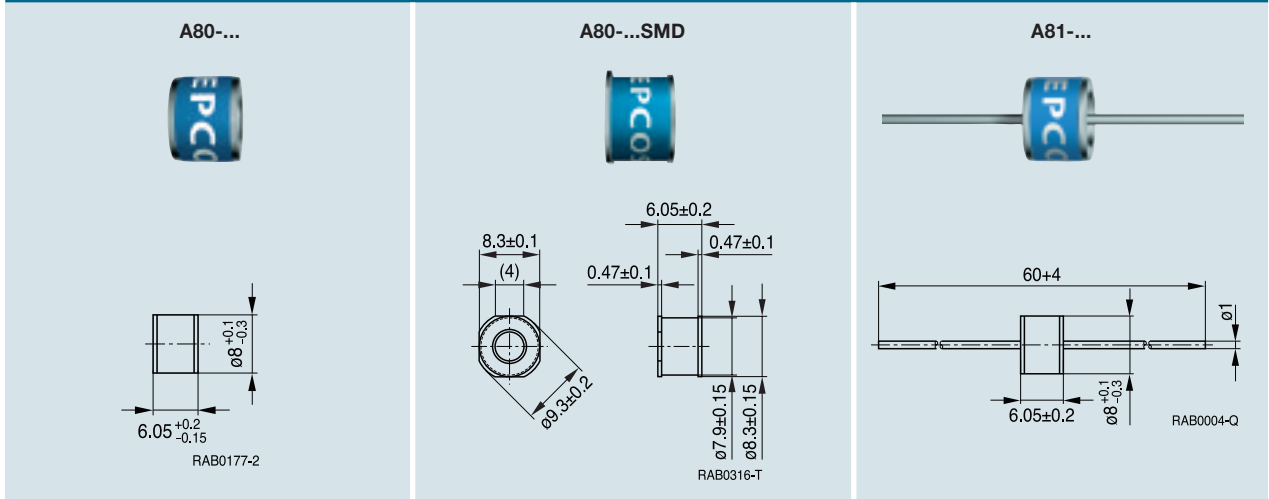

Type 型号 Ordering code 订货号	A80-A75X 可根据要求提供 A80-A75XSMD B88069X6350T602 A81-A75X 可根据要求提供	A80-C90X B88069X1410C103 A80-C90XSMD B88069X1630T602 A81-C90X B88069X1380S102	A80-A230X B88069X2240C103 A80-A230XSMD B88069X1620T602 A81-A230X B88069X2250S102	A80-A250X B88069X2920C103 A81-A250X B88069X1500S102	A80-A350X B88069X2230C103 A81-A350X B88069X2380S102	A80-A600X B88069X2900C103 A81-A600X B88069X2880S102	
标称直流击穿电压 $V_{sd0N}$	75	90	230	250	350	600	V
直流击穿电压容差	$\pm 20$	$\pm 20$	$\pm 20$	$\pm 20$	$\pm 20$	$\pm 20$	%
冲击击穿电压							
测量值 @ 100 V/ $\mu$ s, 99%	< 350	< 500	< 500	< 550	< 700	< 1100	V
典型值 @ 100 V/ $\mu$ s	< 300	< 450	< 450	< 500	< 650	< 950	V
测量值 @ 1 kV/ $\mu$ s, 99%	< 650	< 600	< 650	< 700	< 900	< 1400	V
典型值 @ 1 kV/ $\mu$ s	< 600	< 550	< 550	< 650	< 800	< 1100	V
标称耐工频电流 @ 50 Hz, 1 s	20	20	20	20	20	20	A
耐工频电流 @ 50 Hz, 9周期	100	100	100	100	100	100	A
标称冲击放电电流 10次, 8/20 $\mu$ s	20	20	20	20	20	20	kA
单次冲击放电电流 1次, 8/20 $\mu$ s	25	25	25	25	25	25	kA
冲击放电电流 1次, 10/350 $\mu$ s	2.5	2.5	2.5	2.5	2.5	2.5	kA
冲击放电电流 300次, 10/1000 $\mu$ s	200	200	200	200	200	可根据要求提供	A
绝缘电阻	> 10	> 10	> 10	> 10	> 10	> 10	G $\Omega$
电容 @ 1 MHz	< 1.5	< 1.5	< 1.5	< 1.5	< 1.5	< 1.5	pF

About packing see page 66.  
包装见第66页。

Please read *Important notes* on page 4 and *Cautions and warnings* on page 70.

请阅读第4页的重要信息, 以及第70页的敬告和警告。